



WEBSITE

202404v1

Wanli Tire Corporation Limited

Production base:

NO.3 Wanli Road, Aotou Town, Conghua District, Guangzhou, P.R.China

Headquarters:

Guangzhou Intelligent Manufacturing Park, No.620, Shibe Industrial Road, Dashi Street, Panyu District, Guangzhou, Guangdong, P.R.China.

E-mail:sales@wanlitire.cn

WANLI PCR CATALOGUE

HP/UHP/HT/AT/RT/MT/LT/RFT/WINTER/ALL SEASON

Company profile

- Parent company: Guangzhou Industrial Investment Holding Group (GIIHG)
Wanli Joined it in 2019
- GIIHG was founded in 2019, which was jointly reorganized and established by state-owned companies.
- GIIHG owns 41 well-known brands, holding 6 listed companies and 4 National Equities Exchange and Quotationsed companies
- In the 2023 Fortune Global 500 list, GIIHG ranks 414.


◆ Wanli Tire Co., Ltd., established in 1988 which is controlled directly by Guangzhou Industrial Investment Holding Group Co., Ltd. "WANLI", "SUNNY", "APTANY" and "MILEVER" are four house brands.

◆ Wanli Tire Corporation Limited sells in both domestic market and overseas market. Wanli Tire Corporation has covered 10 series of passenger tire products of Economic, Comfort, Racing tire, UHP, SUV on/off-road, LT, Run Flat tire, Winter tire, and All Season tire with more than 6000 sizes which can meet all requirements from different markets.

◆ WANLI is committed to providing consumers with high-quality tires, and supply more than 80 models of more than 20 OEMs. In the future, WANLI will continue to make efforts in R&D, manufacturing, branding and sales to build the first large state-owned enterprise covering rubber parts for the whole vehicle industry in China. It is planned to achieve an output value of 10 billion yuan by 2025, ranking among the top five in China's tire industry and the top three in technological research and development in China's tire industry.



1 headquarter in Panyu, Guangzhou
2 branch offices in Conghua, Guangzhou and Anhui, Hefei

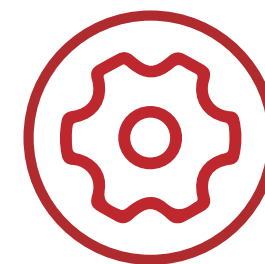

3 production bases
30.4 million production capacity



160 countries and regions
Sales network covers



Global Top **50** in Tire Industry



COMFORT SERIES

SPORT SERIES



RUN-FLAT SERIES

LIGHT TRUGK SERIES



SUV/4X4 SERIES



RACING SERIES

ALL SEASON SERIES



WINTER SERIES



CONTENTS

PRODUCT

COMFORT SERIES

• SP026
• SP022 (EV)

01

SPORT SERIES

• SU306 (EV)
• SA302
• SA305

05

RUN-FLAT SERIES

• SA302

13

LIGHT TRUGK SERIES

• SL106

15

SUV/4X4 SERIES

• SU025 • SU125
• SU006 • SU009
• SU116 • M105

17

RACING SERIES

• SPORT RACING

29

ALL SEASON SERIES

• SC501
• SC513

31

WINTER SERIES

• SW211 • SW611
• SW631 • SW312
• SW103

37



RIDE FREELY
ALWAYS ENJOY

HARMONIC PLUS SP026



COMFORT SERIES
HARMONIC PLUS
SP026

QUIET, COMFORTABLE AND FUEL-EFFICIENT
SUITABLE FOR SMALL & COMPACT CARS



MODEL OF COMFORTABLE AND
QUIET DRIVING

Use "Variable pitch frequency technology on the tire tread to lower the noise. The tread grooves are specially treated with the latest "3D self-conducting technology" to improve driving comfort and quietness.



TECHNOLOGY UPGRADE

The innovative use of "θ tilt angle contour design technology" optimizes the tire's ground contact area and tread stress distribution, thus improving tire handling and wear performance.



MORE FUEL-EFFICIENT AND MORE
ENVIRONMENTALLY
FRIENDLY

Use WANLI FET (Fuel efficient & Environmentally friendly Technology) with high silicon formula design to make the product more fuel-efficient and environmentally friendly.

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
13	60	175/60R13	77	T	5.00B	177	540	250	412
		185/60R13	80	V	5½J	189	552	250	450
	65	165/65R13	77	T	5J	170	544	250	412
		155/70R13	75	T	4½J	157	548	250	387
	70	165/70R13	79	T	5J	170	562	250	437
		175/70R13	82	T	5J	177	576	250	475
		185/70R13	86	H	5½J	189	590	250	530
	80	155/80R13	79	T	4 ½J	157	578	240	437
14	60	165/60R14	75	H	5J	170	554	250	387
		185/60R14	82	H	5½J	189	578	250	475
	65	155/65R14	75	T	4 ½J	157	558	250	387
		165/65R14	79	T	5J	170	570	250	437
		175/65R14	86/XL	T	5J	177	584	290	530
		185/65R14	86	H	5½J	189	596	250	530
	70	165/70R14	81	T	5J	170	588	250	462
		175/70R14	88/XL	T	5J	177	602	290	560
		185/70R14	88	H	5½J	189	616	250	560
		195/70R14	91	H	6J	201	630	250	615
		195/45R15	78	V	6½J	195	557	250	425
15	45	195/45R15	78	V	6½J	195	557	250	425
	50	195/50R15	82	V	6J	201	577	250	475
		165/55R15	75	H	5J	170	563	250	387
	55	185/55R15	82	V	6J	194	585	250	475
		195/55R15	85	V	6J	201	595	250	515
	60	185/60R15	88/XL	H	5 ½J	189	603	290	560
		195/60R15	88	V	6J	201	615	250	560
		205/60R15	91	V	6J	209	627	250	615
	65	175/65R15	84	H	5J	177	609	250	500
		185/65R15	88	H	5 ½J	189	621	250	560
		195/65R15	95/XL	T	6J	201	635	290	690
		205/65R15	94	V	6J	209	647	250	670
	70	215/65R15	96	H	6½J	221	661	250	710
		205/70R15	96	H	6J	209	669	250	710
		215/70R15	98	T	6½J	221	683	250	750
16	45	165/45R16	74/XL	V	5½J	165	554	290	375
	50	165/50R16	77/XL	V	5J	170	572	290	412
		195/50R16	88/XL	V	6J	201	602	290	560
	55	195/55R16	91/XL	V	6J	201	620	290	615
		205/55ZR16	94/XL	W	6 ½J	214	632	290	670
	60	215/60R16	95	V	6 ½J	221	664	250	690
		225/60R16	98	V	6½J	228	676	250	750
	65	205/65R16	95	V	6J	209	672	250	690
		215/65R16	98	V	6½J	221	686	250	750

ENHANCE
DRIVING RANGE



COMFORT SERIES

HARMONIC PLUS
SP022(EV)

QUIET, COMFORTABLE AND FUEL-EFFICIENT
SUITABLE FOR COMPACT AND MID-RANGE VEHICLES



TECHNOLOGY UPGRADES

1. Comprehensive use of more than 14 static and dynamic simulation simulation, product performance has been enhanced in all aspects;
2. The whole series adopts double-layer carcass design, which makes the carcass stronger and more suitable for EVs with heavier bodies;
3. innovative use of "0 tilt angle contour design technology" to optimize the tire grounding area (compared with the previous generation of products 7.3% wider) and tread stress distribution, improve tire handling and wear performance.




QUIET AND COZY

1. The tread adopts the "variable pitch mis-frequency technology", which significantly improves the tire noise.
2. Tread grooves use the latest "3D self-conducting technology" for special treatment. The tread grooves are specially treated with the latest "3D self-conducting technology", which provides soft vibration and smooth airflow conduction, and improves the quietness and comfort performance, and the ride quality is first-class. The driving quality is first-class.



ENERGY CONSERVATION
AND ENVIRONMENTAL PROTECTION

The tread is designed with a new energy-specific FET Function Factor formula that improves range by 7%.

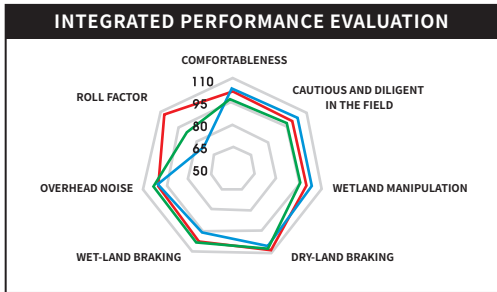

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	55	185/55R15	82	H	6J	194	585	250	475
		195/55R15	85	V	6J	201	595	250	515
	60	175/60R15	81	H	5J	177	591	250	462
		185/60R15	84	H	5½J	189	603	250	500
	65	195/60R15	88	V	6J	201	615	250	560
		165/65R15	81	H	5J	170	595	250	462
		185/65R15	88	H	5½J	189	621	250	560
		195/65R15	91	H	6J	201	635	250	615
		205/65R15	94	V	6J	209	647	250	670
	70	205/70R15	96	H	6J	209	669	250	710
		215/70R15	98	H	6½J	221	683	250	750
16	50	205/50R16	91/XL	V	6½J	214	612	290	615
		175/55R16	80	H	5½J	182	598	250	450
		195/55R16	87	V	6J	201	620	250	545
		205/55R16	91	V	6 ½J	214	632	250	615
	55	205/55R16	94/XL	V	6 ½J	214	632	290	670
		215/55R16	93	W	7J	226	642	250	650
		195/60R16	89	H	6J	201	640	250	580
		205/60R16	92	H	6J	209	652	250	630
		215/60R16	95	V	6½J	221	664	250	690
		215/60R16	99/XL	V	6½J	221	664	290	775
		225/60R16	98	V	6½J	228	676	250	750
		205/65R16	95	V	6J	209	672	250	690
	60	205/65R16	99/XL	H	6J	209	672	290	775
		215/65R16	98	V	6½J	221	686	250	750
		215/45R17	91/XL	W	7J	213	626	290	615
		225/45R17	94/XL	W	7½J	225	634	290	670
17	45	235/45R17	97/XL	W	8J	236	644	290	730
		205/50R17	93/XL	V	6 ½J	214	638	290	650
		215/50R17	91	V	7J	226	648	250	615
		215/50R17	95/XL	V	7J	226	648	290	690
	50	225/50R17	94	V	7J	233	658	250	670
		235/50R17	100/XL	W	7½J	245	668	290	800
		205/55R17	95/XL	W	6 ½J	214	658	290	690
		215/55R17	94	V	7J	226	668	250	670
	55	215/55R17	98/XL	V	7J	226	668	290	750
		225/55R17	101/XL	V	7J	233	680	290	825
		225/55R17	97	V	7J	233	680	250	730
		205/60R17	97/XL	H	6J	209	678	290	730
	60	215/60R17	100/XL	V	6½J	221	690	290	800
		215/60R17	96	H	6½J	221	690	250	710
		215/60R17		V	6½J	221	690	250	710
		225/60R17	103/XL	H	6½J	228	702	290	875
	65	225/60R17	99	H	6½J	228	702	250	775
		215/65R17	103/XL	H	6½J	221	712	290	875
		215/65R17	99	T	6½J	221	712	250	775
		245/65R17	107	T	7J	248	750	250	975
18	40	245/65R17	111/XL	H	7J	248	750	290	1090
		225/40R18	92/XL	W	8J	230	637	290	630
		245/40R18	93	W	8½J	248	653	250	650
		225/45R18	91	V	7 ½J	225	659	250	615
	45	225/45R18	95/XL	V	7 ½J	225	659	290	690
		235/45R18	94	V	8J	236	669	250	670
		235/45R18	98/XL	W	8J	236	669	290	750
		245/45R18	100/XL	W	8J	243	677	290	800
	50	215/50R18	92	W	7J	226	673	250	630
		215/50R18	96/XL	V	7J	226	673	290	710
		235/50R18	101/XL	V	7½J	245	693	290	825
		235/50R18	97	W	7½J	245	693	250	730
	55	205/55R18	96/XL	H	6 ½J	214	683	290	710
		215/55R18	95	V	7J	226	693	250	690
		225/55R18	102/XL	V	7J	233	705	290	850
		225/55R18	98	V	7J	233	705	250	750
	60	235/55R18	100	V	7 ½J	245	715	250	800
		225/60R18	100	V	6½J	228	727	250	800
		225/60R18	104/XL	V	6½J	228	727	290	900
		225/55R19	99	V	7J	233	731	250	775

PERFECT BRAKING





SPORT SERIES

RANGE SPORT SU306(EV)

Control, *E* is the way.

SUITABLE FOR MEDIUM/MEDIUM-LARGE VEHICLES



PRECISE CONTROL AND SMOOTHNESS

The tread uses the latest "LEADING-PATTERN" platform concept pattern, with an asymmetric design that separates the functions of the inner and outer sides for more precise handling. It also employs "variable pitch mistuning technology" to improve tire noise.




FEARLESS, UNCOMPROMISING ON SAFETY

Through the efficient design of a wide main groove and multiple auxiliary side grooves, the high-performance drainage system ensures that the wet and slippery road surface still maintains excellent performance and stable operational capabilities.



ULTRA-STRONG STRUCTURE SHORTER BRAKING DISTANCE

The whole series adopts double-layer high-molded, low-shrinkage polyester carcass skeleton material, with a stronger carcass. Highly rigid, block-like ribs in the middle of the tread improve the tread strength, stronger grip, shorter braking distance, and greatly improve driving safety.



SUPER ENERGY SAVING

The tread is designed with Wanli FET Functional Factor Formula, which improves the range by 7%, and is tested by authoritative organizations, and the Rolling Resistance EU Label grade can reach A level.

RANGE SPORT SU306EV

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
17	65	225/65R17	102	H	6½J	228	724	250	850
	40	255/40R18	99/XL	W	9J	260	661	290	775
	45	255/45R18	103/XL	W	8½J	255	687	290	875
18	45	275/45R18	107/XL	W	9J	273	705	290	975
		225/50R18	95	W	7J	233	683	250	690
		225/50R18	99/XL	V	7J	233	683	290	775
	50	245/50R18	104/XL	W	7½J	253	703	290	900
		255/55R18	109/XL	V	8J	265	737	290	1030
		235/60R18	103	V	7J	240	739	250	875
	60	245/60R18	105	H	7J	248	751	250	925
		235/65R18	106	H	7J	240	763	250	950
		235/40R19	96/XL	W	8½J	241	671	290	710
19	40	255/40R19	100/XL	W	9J	260	687	290	800
		275/40R19	101	W	9½J	275	703	250	825
		225/45R19	96/XL	V	7½J	225	685	290	710
	45	225/45R19	96/XL	W	7½J	225	685	290	710
		235/45R19	99/XL	V	8J	236	695	290	775
		235/45R19	99/XL	W	8J	236	695	290	775
		245/45R19	102/XL	W	8J	243	703	290	850
		255/45R19	104/XL	W	8½J	255	713	290	900
		275/45R19	108/XL	W	9J	273	731	290	1000
		235/50R19	103/XL	V	7 ½J	245	719	290	875
	50	235/50R19	103/XL	W	7 ½J	245	719	290	875
		235/50R19	99	V	7 ½J	245	719	250	775
		245/50R19	105/XL	W	7½J	253	729	290	925
		255/50R19	107/XL	V	8J	265	739	290	975
		265/50R19	110/XL	W	8½J	277	749	290	1060
	55	235/55R19	101	V	7½J	245	741	250	825
		235/55R19	105/XL	V	7½J	245	741	290	925
		245/55R19	103	H	7½J	253	753	250	875
		255/55R19	111/XL	V	8J	265	763	290	1090
		255/55R19	111/XL	W	8J	265	763	290	1090
20	35	275/35R20	102/XL	W	9 ½J	278	700	290	850
		245/40R20	99/XL	W	8½J	248	704	290	775
		255/40R20	101/XL	W	9J	260	712	290	825
	40	265/40R20	104/XL	W	9½J	271	720	290	900
		275/40R20	106/XL	W	9½J	278	728	290	950
		295/40R20	110/XL	W	10½J	301	744	290	1060
		235/45R20	100/XL	W	8J	236	720	290	800
		245/45R20	103/XL	W	8J	243	728	290	875
	45	255/45R20	101	V	8½J	255	738	250	825
		255/45R20	105/XL	W	8½J	255	738	290	925
		265/45R20	108/XL	W	9J	266	746	290	1000
		275/45R20	110/XL	W	9J	273	756	290	1060
		285/45R20	112/XL	W	9 ½J	285	764	290	1120
		235/50R20	100	V	7 ½J	245	744	250	800
		245/50R20	102	V	7½J	253	754	250	850
	50	255/50R20	109/XL	W	8J	265	764	290	1030
		265/50R20	111/XL	V	8½J	277	774	290	1090
		235/55R20	102	V	7 ½J	245	766	250	850
	55	255/55R20	110/XL	W	8J	265	788	290	1060
		255/35R21	98/XL	W	9J	260	711	290	750
21	35	275/35R21	103/XL	W	9 ½J	278	725	290	875
		295/35R21	107/XL	W	10½J	301	739	290	975
		265/40R21	105/XL	W	9 ½J	271	745	290	925
	40	255/45R21	102	H	8½J	255	763	250	850
		265/45R21	104	W	9J	266	771	250	900
		265/45R21	108/XL	W	9J	266	771	290	1000
	45	275/45R21	110/XL	W	9J	273	781	290	1060
		265/40R22	106/XL	V	9½J	271	771	290	950
	22	275/40R22	107/XL	W	9½J	278	779	290	975
		285/45R22	114/XL	V	9 ½J	285	815	290	1180

ULTIMATE OPERATION AND CONTROL, AND ALL-ROUND DRIVING

PRODUCT FEATURES

Inner tread Asymmetrical tread design Outer tread



THE HIGH-VISCOSITY RESIN FORMULA INCREASES GRIP

Specially formulated tread uses F-SSBR, coupled with high content of nanoscale silica, to achieve good handling and confident stopping on rainy days.



WATER EVACUATION TREAD

Staggered patterns in the middle of the tread enhance drainage and wet grip.



DYNAMIC CONTROL

Narrow longitudinal central tread provides increased contact surface.

Good cornering capabilities with excellent contact area.



— Previous generation of Wanli tire
— Brand
— Wanli SA302 Test Values



SPORT SERIES

**SPORT macro
SA302**

**SUPER-HIGH PERFORMANCE,
SAFE AND EFFICIENT**

SUITABLE FOR MIDSIZE AND LUXURY CARS



SPORT macro SA302

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
15	50	205/50R15	89/XL	V	6 ½J	214	587	290	580
	65	195/65R15	91	H	6J	201	635	250	615
16	45	195/45ZR16	84/XL	W	6½J	195	582	290	500
		205/45ZR16	87/XL	W	7J	206	590	290	545
		215/45R16	86	H	7J	213	600	250	530
		195/55R16	87	V	6J	201	620	250	545
		205/55R16	91	V	6½J	214	632	250	615
	55	215/55ZR16	97/XL	W	7J	226	642	290	730
		225/55R16	99/XL	V	7J	233	654	290	775
		205/60R16	92	V	6J	209	652	250	630
		205/60R16	96/XL	H	6J	209	652	290	710
	60	205/60ZR16	92	W	6J	209	652	250	630
		215/60R16	95	V	6½J	221	664	250	690
		205/40ZR17	84/XL	W	7½J	212	596	290	500
		215/40ZR17	87/XL	W	7½J	218	604	290	545
	40	245/40ZR17	91	W	8½J	248	628	250	615
		205/45ZR17	88/XL	W	7J	206	616	290	560
17	45	215/45ZR17	91/XL	W	7J	213	626	290	615
		225/45ZR17	94/XL	W	7½J	225	634	290	670
		235/45ZR17	97/XL	W	8J	236	644	290	730
		245/45ZR17	99/XL	W	8J	243	652	290	775
		255/45R17	102/XL	V	8½J	255	662	290	850
	50	205/50ZR17	93/XL	W	6½J	214	638	290	650
		215/50R17	95/XL	V	7J	226	648	290	690
		215/50ZR17	91	W	7J	226	648	250	615
		215/50ZR17	95/XL	W	7J	226	648	290	690
		225/50ZR17	98/XL	W	7J	233	658	290	750
	55	235/50ZR17	100/XL	W	7½J	245	668	290	800
		205/55ZR17	95/XL	W	6 ½J	214	658	290	690
		215/55R17	98/XL	W	7J	226	668	290	750
		215/55ZR17	98/XL	W	7J	226	668	290	750
		225/55ZR17	101/XL	W	7J	233	680	290	825
	35	235/55ZR17	103/XL	W	7½J	245	690	290	875
		255/35ZR18	94/XL	W	9J	260	635	290	670
18	35	265/35ZR18	97/XL	W	9½J	271	643	290	730

SPORT macro SA302

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
18	40	215/40ZR18	89/XL	W	7½J	218	629	290	580
		225/40ZR18	92/XL	W	8J	230	637	290	630
		235/40ZR18	95/XL	W	8½J	241	645	290	690
		245/40ZR18	97/XL	W	8½J	248	653	290	730
		255/40ZR18	99/XL	W	9J	260	661	290	775
	45	215/45ZR18	93/XL	W	7J	213	651	290	650
		225/45ZR18	95/XL	W	7½J	225	659	290	690
		235/45R18	94	V	8J	236	669	250	670
		235/45ZR18	98/XL	W	8J	236	669	290	750
		245/45ZR18	100/XL	W	8J	243	677	290	800
	50	235/50ZR18	101/XL	W	7½J	245	693	290	825
		235/50ZR18	97	W	7 ½J	245	693	250	730
		245/50ZR18	104/XL	W	7½J	253	703	290	900
		235/55R18	104/XL	V	7½J	245	715	290	900
	30	265/30ZR19	93/XL	W	9½J	271	643	290	650
		275/30ZR19	96/XL	W	9½J	278	649	290	710
19	35	215/35ZR19	85/XL	W	7½J	218	633	290	515
		225/35ZR19	88/XL	W	8J	230	641	290	560
		235/35ZR19	91/XL	W	8½J	241	647	290	615
		245/35ZR19	93/XL	W	8½J	248	655	290	650
		225/40ZR19	93/XL	W	8J	230	663	290	650
	40	245/40ZR19	98/XL	W	8½J	248	679	290	750
		255/40ZR19	100/XL	W	9J	260	687	290	800
	45	245/45ZR19	102/XL	W	8J	243	703	290	850
		285/45R19	107	V	9 ½J	285	739	250	975
	50	255/50ZR19	107/XL	W	8J	265	739	290	975
20	55	245/55R19	103	H	7½J	253	753	250	875
	30	275/30ZR20	97/XL	W	9½J	278	674	290	730
	35	225/35ZR20	90/XL	W	8J	230	666	290	600
		245/35ZR20	95/XL	W	8½J	248	680	290	690
		255/35ZR20	102/XL	W	9J	260	686	290	850
		315/35ZR20	110/XL	W	11J	320	728	290	1060
	40	245/40ZR20	99/XL	W	8½J	248	704	290	775
		275/40ZR20	106/XL	W	9½J	278	728	290	950
	45	245/45ZR20	103/XL	W	8J	243	728	290	875
		255/45R20	105/XL	H	8½J	255	738	290	925
		275/45ZR20	110/XL	W	9J	273	756	290	1060

EXPLOSION PROOF



SPORT SERIES

SAFE COMFORTABLE SA305

Intermediate and high-level vehicle use

THE THIRD GENERATION OF AIR-TIGHT TECHNOLOGY

3 core advantages

1 Stronger

Double-layer tire construction with reinforced sidewall support.

2 Safer

Puncture-resistant design for extended driving range even in case of air loss.

3 Comfort

The sidewalls employ rubber softening technology, enhancing tire elasticity for superior comfort.




EXCELLENT PERFORMANCE IN DRY AND WET AREAS

The tread formula is designed with a higher content of silica to ensure higher grip and safety on wet and dry roads.



TECHNOLOGY UPGRADES, FULL OF COMFORT

1. The new generation of "RST MAX" sidewall enhancement technology can easily cope with extreme situations such as nail piercing and puncture.
2. The sidewall uses "rubber softening technology" to make the carcass more elastic, reduce the trouble of driving bumps, and have better comfort than traditional RFT tires.



EXTREME HANDLING

The asymmetrical tread pattern design provides good handling.

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
16	55	225/55R16	95	V	7J	233	654	250	690
17	40	245/40ZR17	91	W	8½J	248	628	250	615
	45	205/45ZR17	84	W	7J	206	616	250	500
		225/45ZR17	91	W	7½J	225	634	250	615
		245/45ZR17	95	W	8J	243	652	250	690

SAFE COMFORTABLE SA305

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
17	50	215/50ZR17	95/XL	W	7J	226	648	290	690
		225/50ZR17	94	W	7J	233	658	250	670
		205/55ZR17	91	W	6½J	214	658	250	615
	55	225/55R17	97	V	7J	233	680	250	730
		235/55ZR17	99	W	7½J	245	690	250	775
		225/40ZR18	88	W	8J	230	637	250	560
	40	245/40ZR18	93	W	8½J	248	653	250	650
		255/40ZR18	95	W	9J	260	661	250	690
		275/40ZR18	99	W	9½J	278	677	250	775
	45	225/45ZR18	95/XL	W	7½J	225	659	290	690
		245/45ZR18	96	W	8J	243	677	250	710
		255/45ZR18	99	W	8½J	255	687	250	775
18	50	225/50ZR18	95	W	7J	233	683	250	690
		235/50ZR18	97	W	7½J	245	693	250	730
		245/50ZR18	100	W	7½J	253	703	29250	800
	55	235/55ZR18	100	W	7½J	245	715	250	800
		255/55R18	105	V	8J	265	737	250	925
		225/35ZR19	84	W	8J	230	641	250	500
	35	255/35ZR19	92	W	9J	260	661	250	630
		275/35ZR19	96	W	9½J	278	675	250	710
		245/40ZR19	94	W	8½J	248	679	250	670
	40	255/40ZR19	96	W	9J	260	687	250	710
		275/40ZR19	101	W	9½J	278	703	250	825
		225/45ZR19	92	W	7½J	225	685	250	630
19	45	245/45ZR19	98	W	8J	243	703	250	750
		245/50ZR19	101	W	7½J	253	729	250	825
		255/50ZR19	103	W	8J	265	739	250	875
	55	235/55ZR19	101	W	7½J	245	741	250	825
		255/55ZR19	107	W	8J	265	763	250	975
		245/35ZR20	91	W	8½J	248	680	250	615
	35	255/35ZR20	93	W	9J	260	686	250	650
		275/35ZR20	98	W	9½J	278	700	250	750
		315/35ZR20	106	W	11J	320	728	250	950
	40	245/40ZR20	95	W	8½J	248	704	250	690
		275/40ZR20	102	W	9½J	278	728	250	850
		305/40ZR20	112/XL	W	11J	313	752	290	1120
20	45	245/45ZR20	99	W	8J	243	728	250	775
		255/45ZR20	101	W	8½J	255	738	250	825
		275/45ZR20	106	W	9J	273	756	250	950
	35	275/35ZR21	103/XL	W	9½J	278	725	290	875
		295/35ZR21	107/XL	W	10½J	301	739	290	975
		315/35ZR21	111/XL	W	11J	320	753	290	1090
	40	245/40ZR21	100/XL	W	8½J	248	729	290	800
		275/40ZR21	107/XL	W	9½J	278	753	290	975
		285/45ZR21	109	W	9½J	285	789	250	1030
	30	315/30ZR22	107/XL	W	11J	320	749	290	975
		275/35ZR22	104/XL	W	9½J	278	751	290	900
		315/35ZR22	111/XL	W	11J	320	779	290	1090
22	40	275/40ZR22	107/XL	W	9½J	278	779	290	975

TOP-LEVEL PROTECTION DRIVING SAFE

SPORT macro SA302



RUN-FLAT SERIES

**SPORT macro
SA302**



**SAFE CONVENIENT OPERATION AND
CONTROL ON DRY GROUNDS**

SUITABLE FOR MIDSIZE AND LUXURY CARS



RST TECHNOLOGY (Wanhua sidewall support enhanced technology)

It uses computer simulation system , and adopts advanced sidewall structure preventing deformation to increase anti-pressure performance of sidewall to the maximum , so that tire deformation caused by internal tension and traction due to air leakage of punctured tire can be effectively resisted.

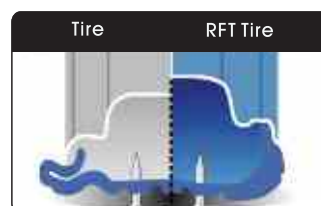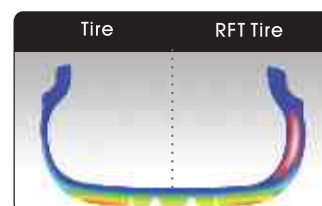

OPTIMIZED TIRE BEAD PART DESIGN

Optimally designed tire bead part can optimize the stress distribution between tire and rim, so as to effectively avoid tire unseating problem after a tire is lost.




SPECIAL SIDEWALL MATERIALS

Originally creative rubber materials with excellent heat resistance are used to provide sufficient rigidity for sidewalls of tires , so as to prevent loss of vehicle control caused by pressure loss after a tire was punctured.

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
16	55	195/55RF16	87	V	6J	201	620	250	545
		205/55RF16	91	V	6½J	214	632	250	615
		225/55RF16	95	V	7J	233	654	250	690
17	45	205/45ZRF17	84	W	7J	206	616	250	500
		225/45ZRF17	91	W	7½J	225	634	250	615
		205/50ZRF17	89	W	6½J	214	638	250	580
	50	215/50RF17	91	V	7J	226	648	250	615
		215/50RF17	95/XL	V	7J	226	648	290	690
		225/50ZRF17	94	W	7J	233	658	250	670
18	55	225/55ZRF17	97	W	7J	233	680	250	730
		235/55ZRF17	99	W	7½J	245	690	250	775
		245/35ZRF18	88	Y	8½J	248	629	250	560
	35	225/40ZRF18	88	W	8J	230	637	250	560
		255/40ZRF18	95	W	9J	260	661	250	690
		275/40ZRF18	99	W	9½J	278	677	250	775
19	45	225/45ZRF18	91	W	7½J	225	659	250	615
		235/45RF18	98/XL	V	8J	236	669	290	750
		245/45ZRF18	96	W	8J	243	677	250	710
	50	225/50RF18	95	V	7J	233	683	250	690
		235/50RF18	97	V	7½J	245	693	250	730
		245/50ZRF18	100	W	7½J	253	703	250	800
	55	215/55RF18	95	V	7J	226	693	250	690
		235/55RF18	100	V	7½J	245	715	250	800
		255/55RF18	105	V	8J	265	737	250	925
	35	275/35ZRF19	96	W	9½J	278	675	250	710
		245/40ZRF19	94	W	8½J	248	679	250	670
		275/40ZRF19	101	W	9½J	278	703	250	825
20	45	245/45ZRF19	98	W	8J	243	703	250	750
		285/45RF19	107	V	9½J	285	739	250	975
	50	255/50RF19	103	V	8J	265	739	250	875

ANALYSIS OF TIRE SIDEWALL PRESSURE AT INSTANTANEOUS ZERO AIR PRESSURE

CPRESS VALUE



SAFER

When the pressure is reduced to 0 kPa, under a normal usage condition , the vehicle can drive for a distance between 80 km to 150 km at a speed of less than 80km/h

SPACE SAVING

There is no need to reserve space for a spare tire.



TRACFORCE SL106

EXCELLENT BEARING



LIGHT TRUCK SERIES

TRACFORCE SL106

HIGH MILEAGE ANTI-LOAD AND WEAR-RESISTANCE

SUITABLE FOR COMMERCIAL LIGHT TRUCK



SAFER

Shorter braking distances make driving safer on rainy days. The symmetrical through zigzag rib design enhances tread stiffness, increases the ground contact area, and can provide good driving and braking performance.




GREATLY IMPROVED CARRYING CAPACITY

The tire structure is improved to carry more and the carrying capacity is increased by 15%. The closed shoulder design effectively enhances the stiffness of the shoulders, increases the ground contact area of the tire, and improves tire handling stability and wear performance.



HIGH MILEAGE

High abrasion furnace black brings a better wear performance and longer life, making the tire economical and durable. The three vertical zigzag grooves can quickly drain water, ensuring good safety performance on wet conditions.

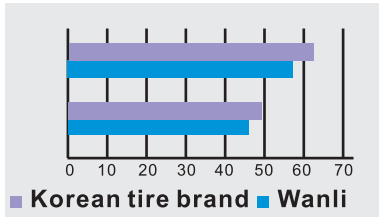

Wet surface braking distance / meter
Wanli: 56.25 meters
Korean tire brand: 60_61 meters

Dry surface braking distance / meter
Wanli: 46.17 meters
Korean tire brand: 49.17 meters

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
12		155R12C	88/86	N	8/D	4½J	157	553	450	560
13	70	165/70R13C	88/86	S	6/C	5J	170	562	375	560
		155R13C	85/83	R	6/C	4 ½ J/4.50B	157	578	350	515
		165R13C	91/89	S	6/C	4 ½ J/4.50B	167	596	375	615
		175R13C	97/95	R	8/D	5.00B/5J	177	610	450	730
		175/65R14C	90/88	T	6/C	5J	177	584	375	600
14	70	165/70R14C	89/87	R	6/C	5J	170	588	375	580
		175/70R14C	95/93	T	6/C	5J	177	602	375	690
		175/75R14C	99/98	S	8/D	5J	177	618	475	775
	75	165R14C	96/95	T	8/D	41/2J	165	620	450	710
		175R14C	99/98	R	8/D	5J	178	634	450	775
		185R14C	102/100	R	8/D	5 ½J	188	650	450	850
	65	195R14C	106/104	R	8/D	5½J	198	666	450	950
		215/65R15C	104/102	T	6/C	6½J	221	661	375	900
		195/70R15C	104/102	R	8/D	6J	201	655	450	900
15	70	205/70R15C	106/104	R	8/D	6J	209	669	450	950
		215/70R15C	109/107	S	8/D	6½J	221	683	450	1030
		225/70R15C	106/103	R	8/D	6½J	228	697	450	950
		225/70R15C	112/110	R	8/D	6½J	228	697	450	1120
		185R15C	103/102	R	8/D	5½J	188	674	450	875
		195R15C	106/104	N	8/D	5½J	198	690	450	950
	60	195R15C	106/104	S	8/D	5½J	198	690	450	950
		195/60R16C	99/97	H	6/C	6J	201	640	375	775
		215/60R16C	108/106	T	8/D	6½J	221	664	475	1000
	65	195/65R16C	104/102	T	8/D	6J	201	660	475	900
		205/65R16C	107/105	T	8/D	6J	209	672	475	975
		215/65R16C	109/107	T	8/D	6 ½J	221	686	475	1030
16	70	225/65R16C	112/110	R	8/D	6 ½J	228	698	475	1120
		235/65R16C	115/113	T	8/D	7J	240	712	475	1215
		215/70R16C	108/106	T	6/C	6½J	221	708	375	1000
	75	185/75R16C	104/102	R	8/D	5J	184	684	475	900
		195/75R16C	107/105	T	8/D	5 ½J	196	698	475	975
		195/75R16C	110/108	T	10/E	5 ½J	196	698	525	1060
		205/75R16C	113/111	R	10/E	5 ½J	203	714	525	1150
		215/75R16C	116/114	R	10/E	6J	216	728	525	1250
		215/75R16C	116/114	S	10/E	6J	216	728	525	1250
	85	225/75R16C	121/120	R	10/E	6J	223	744	575	1450
		235/85R16C	114/111	S	8/D	6½J	235	806	475	1180
		225/55R17C	109/107	T	8/D	7J	233	680	475	1030
	55									*

*coming soon

TRAVEL AROUND THE CITY FREE



SUV/4X4 SERIES HT RANGETOUR PLUS SU025

QUIET AND COMFORTABLE PERFORMANCE
ON DRY AND WET GROUNDS

SUITABLE FOR URBAN SUV



UPGRADED AND MORE ENVIRONMENTAL-FRIENDLY FORMULA

Enhanced tire traction and reduced rolling resistance with the special high silicon formula.



MORE QUIET AND COMFORTABLE EXPERIENCE

The closed shoulder groove design helps to reduce the noise. The subsidiary groove design can reduce the rigidity of the pattern block, which provides comfortable performance. Optimized sequence structure can reduce the noise effectively.



OUTSTANDING CONTROL ON DRY AND WET GROUNDS

The shoulder pattern use thin chamfer design, which can prevent pebbles trapping conditions. The thin grooves on the tread provide excellent wet drainage and handling stability. Four wide main grooves on the tread provide good drainage and contribute to wetland security. Four wider ribs design allows the tire to operate and control in wet condition.

RANGETOUR PLUS SU025

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)	
15	75	235/75R15	105	T	6½J	235	733	250	925	
16	60	235/60R16	100	V	7J	240	688	250	800	
	70	215/70R16	100	H	6½J	221	708	250	800	
		225/70R16	103	H	6½J	228	722	250	875	
		235/70R16	106	H	7J	240	736	250	950	
		245/70R16	107	H	7J	248	750	250	975	
		265/70R16	112	T	8J	272	778	250	1120	
		275/70R16	114	T	8J	279	792	250	1180	
		215/60R17	96	V	6½J	221	690	250	710	
17	60	225/60R17	99	V	6½J	228	702	250	775	
		235/60R17	102	H	7J	240	714	250	850	
		255/60R17	106	H	7½J	260	738	250	950	
		225/65R17	102	V	6½J	228	724	250	850	
		235/65R17	104	H	7J	240	738	250	900	
	65	245/65R17	111/XL	T	7J	248	750	290	1090	
		265/65R17	112	T	8J	272	776	250	1120	
		285/65R17	116	H	8½J	292	802	250	1250	
	70	245/70R17	110	T	7J	248	776	250	1060	
		265/70R17	115	T	8J	272	804	250	1215	
	18	50	235/50ZR18	101/XL	W	7½J	245	693	290	825
		55	225/55R18	98	V	7J	233	705	250	750
235/55R18			100	V	7½J	245	715	250	800	
225/60R18			104/XL	V	6½J	228	727	290	900	
60		235/60R18	107/XL	V	7J	240	739	290	975	
		245/60R18	105	H	7J	248	751	250	925	
		265/60R18	114/XL	H	8J	272	775	290	1180	
		285/60R18	116	H	8½J	292	799	250	1250	
		265/65R18	114	H	8J	272	801	250	1180	
65		275/65R18	116	T	8J	279	815	250	1250	
		70	255/70R18	113	T	7½J	260	815	250	1150
			265/70R18	116	H	8J	272	829	250	1250
19	40	235/40ZR19	96/XL	W	8½J	241	671	290	710	
	55	235/55R19	101	V	7½J	245	741	250	825	
20	40	275/40ZR20	106/XL	W	9½J	278	728	290	950	
	45	245/45ZR20	103/XL	W	8J	243	728	290	875	
	50	285/50R20	116/XL	V	9J	297	794	290	1250	
	55	235/55R20	102	V	7½J	245	766	250	850	
		275/55R20	117/XL	V	8½J	284	810	290	1285	
	60	275/60R20	115	H	8J	279	838	250	1215	
21	30	285/30R21	100/XL	W	10J	290	705	290	800	
	35	245/35R21	96/XL	W	8½J	248	705	290	710	
	45	265/45R21	104	W	9J	266	771	250	900	
	50	275/50R21	113/XL	W	8½J	284	809	290	1150	
22	40	275/40ZR22	107/XL	W	9½J	278	779	290	975	
	45	285/45R22	114/XL	V	9½J	285	815	290	1180	
	50	275/50R22	111	V	8½J	284	835	250	1090	



ALL-TERRAIN ABILITY FREELY DRIVES

SUV/4X4 SERIES AT SU125

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
15	70	255/70R15C	112/110	S	6/C	7½J	260	739	375	1120
		265/70R16	112	S		8J	272	778	250	1120
16	70	275/70R16	114	H	6/C	8J	279	792	250	1180
		205R16C	106/104	R		6J	208	734	350	950
17	65	265/65R17	112	T		8J	272	776	250	1120
		275/65R17	115	H		8J	279	790	250	1215
	70	285/65R17	116	H		8½J	292	802	250	1250
		265/70R17	115	S		8J	272	804	250	1215
18	60	265/60R18	110	H		8J	272	775	250	1060
		285/60R18	116	H		8½J	292	799	250	1250
20	55	265/55R20	113/XL	V		8½J	277	800	290	1150



SUV/4X4 SERIES HT ALLTERRAIN SERIES SU125

EXCELLENT GRIP & CONTROL IN
ALL ROAD CONDITIONS
SUITABLE FOR PICK-UP TRUCKS



IMPROVED COMFORTABLE EXPERIENCE

Tread : Optimized pitch sequence arrangement , multi-pitch design for noise reduction.Numerous evenly distributed knife groove pattern design reduces the rigidity of tread pattern blocks and improves driving comfort.
Tire shoulder : Closed groove design on the shoulder reduces resonance of columnar airflow and noise.



BETTER HANDLING ON VARIOUS ROAD CONDITIONES

Four wide zigzag-shaped grooves bring excellent water-displacement ability,evenly spread stress across the tread,improve traction on mud ground and reduce the chance of gravels being struck in the tread.



STRONGER AND LONG MILEAGE

The tread uses materials and ingredlents designed for good wear-resisting and anti-tearing performance,Thus the tread can defend against impacts from flying gravels and prolong tire's service life.Together with enhanced carcass and bead,tire's load-carrying capacity is greatly improved.



THE WORLD IS YOUR PLAYGROUND



SUV/4X4 SERIES AT ALPINISM A/T SU006

VERSATILE OFF-ROAD PERFORMANCE
WITH STRONG TRACTION AND STABILITY
FOR SAFE ADVENTURES

SUITABLE FOR MID-LARGE SUV & OFF-ROAD CARS



TIGER-TEETH TREAD PATTERN

Provides excellent grip with great mountain performance and off-road performance.



INTERLEAVING SHOULDER TREAD PATTERN AND ARMOR SIDEWALL

Guarantees exceptional control on wet and sandy road conditions, effectively avoid wearing during demanding road condition.



SPECIAL 3D WATER EVACUATION TREAD WITH ENHANCED STRUCTURE

Prevents stress concentration on the tread and also prevents pebbles trapping conditions.



CENTRAL VERTICAL GROOVE

Deeper and wider central grooves to ensure good drainage and mud removal. Advanced abrasion resistant formula to ensure wear performance.

ALPINISM A/T SU006

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	65	205/65R15	94	H		6J	209	647	250	670
	70	205/70R15	96	H		6J	209	669	250	710
	75	215/75R15LT	100/97	S	6/C	6J	216	703	350	800
		30×9.50R15LT	104	S	6/C	7½J	240	750	350	900
		31×10.50R15LT	109	Q	6/C	8½J	268	775	350	1030
16	60	205/60R16	92	H		6J	209	652	250	630
		235/60R16	100	V		7J	240	688	250	800
	70	235/70R16	106	S		7J	240	736	250	950
		245/70R16	111/XL	T		7J	248	750	290	1090
		255/70R16	111	T		7½J	260	764	250	1090
		265/70R16	112	S		8J	272	778	250	1120
		275/70R16	114	S		8J	279	792	250	1180
	75	LT225/75R16	115/112	S	10/E	6J	223	744	550	1215
		LT245/75R16	108/104	S	6/C	7J	248	774	350	1000
		LT245/75R16	120/116	S	10/E	7J	248	774	550	1380
		LT265/75R16	123/120	S	10/E	7½J	267	804	550	1550
		LT285/75R16	126/123	R	10/E	8J	286	834	550	1700
17	85	LT235/85R16	120/116	S	10/E	6½J	235	806	550	1380
		225/65R17	102	T		6½J	228	724	250	850
		245/65R17	107	T		7J	248	750	250	975
		265/65R17	112	S		8J	272	776	250	1120
		275/65R17	115	S		8J	279	790	250	1215
	70	285/65R17	116	S		8½J	292	802	250	1250
		LT265/70R17	121/118	S	10/E	8J	272	804	550	1450
		LT285/70R17	121/118	R	10/E	8½J	292	832	550	1450
	55	225/55R18	98	V		7J	233	705	250	750
		225/60R18	104/XL	V		6½J	228	727	250	900
18	60	265/60R18	110	H		8J	272	775	250	1060
		285/60R18	116	H		8½J	292	799	250	1250
		265/50R20	111/XL	V		8½J	277	774	290	1090
	50	285/50R20	116/XL	H		9J	297	794	290	1250
20	55	275/55R20	117/XL	H		8½J	284	810	290	1285



ALL TERRAINS



SUV/4X4 SERIES AT ALPINISM A/T SU009

SUITABLE FOR ALL-ROAD OFF-ROAD USE




SELF-CLEANING TECHNOLOGY ON THE TREAD, FEARLESS AGAINST SAND AND STONES.

The tread features a three-dimensional stepped pattern groove and reinforced rib design, preventing stress concentration on the tread surface and effectively preventing stone trapping situations, avoiding tire damage caused by sand and stones.



STRONG TRACTION, EFFORTLESSLY HANDLING VARIOUS ROAD CONDITIONS.

The rugged block pattern arranged in a 'butterfly' layout provides robust traction, ensuring the tire's off-road performance on complex terrains. The interlocking sawtooth shoulder blocks guarantee tire control on unpaved surfaces.



DIAMOND-LIKE RESILIENCE, ALL-AROUND PROTECTION.

Tread: Utilizes a high-wear and tear-resistant formula, puncture-resistant;
Casing: Equipped with a dual-layer tire body structure for increased strength;
Sidewall: Adopts a 3D peak design to effectively resist external impacts; With three layers of defense, it creates a diamond-like robustness.
The tire is more robust, more wear-resistant, resistant to punctures, ensuring safer travel.



ALPINISM A/T SU009

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	65	205/65R15	94	H		6J	209	647	250	670
	70	205/70R15	96	H		6J	209	669	250	710
	75	235/75R15	109/XL	T		6½J	235	733	290	1030
		31 × 10.50R15LT	109	S	6/C	8½J	268	775	350	1030
16	60	205/60R16	92	H		6J	209	652	250	630
	70	235/70R16	106	T		7J	240	736	250	950
		245/70R16	111/XL	T		7J	248	750	290	1090
		255/70R16	111	T		7½J	260	764	250	1090
		265/70R16	112	T		8J	272	778	250	1120



CONQUER SANDS AND OBSTACLES



SUV/4X4 SERIES RT ARMOR OFF-ROAD RT SU116

SUITABLE FOR OFF-ROAD CARS



RUGGED PATTERNS, FEARLESS MOUNTAIN CHALLENGES

Featuring a unique dual-wide, winding self-cleaning main groove, this tire boasts exceptional wetland drainage capabilities. Paired with an open-shoulder tread block design, it provides strong traction and lateral stability, ensuring superior grip on muddy and sandy terrains.




ACTIVE NOISE REDUCTION, ELEVATING THE DRIVING EXPERIENCE

With its unique shuttle-shaped X-armored central tread block design, this tire not only improves puncture resistance but also optimizes the ground contact angle. Combined with multi-directional winding grooves and active noise reduction technology, it reduces the resonance of columnar airflow. Additionally, the optimized pitch arrangement across the entire tread surface lowers pass-by noise, enhancing the driving comfort.



STURDIER AND INCREDIBLY DURABLE

The tread surface is crafted with a customized, highly abrasion-resistant and tear-resistant compound, effectively resisting impacts from gravel on the road and prolonging the tire's lifespan. Coupled with a reinforced carcass and bead design, the tire is solidly built, greatly enhancing its load-bearing capacity.



3D SIDEWALL DESIGN, SHOWCASING A VARIETY OF VISUAL EXPERIENCES

The sidewall features a three-dimensional design that enhances the tire's grip on muddy and sandy surfaces. Furthermore, the addition of white lettering elements creates a visually striking appearance, perfectly complementing the vehicle's visual impact.

ARMOR OFF-ROAD RT **SU116**

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
16	70	245/70R16LT	113/110	S	8/D	7J	248	750	450	1150
		265/70R16LT	117/114	Q	8/D	8J	272	778	450	1285
	75	LT245/75R16	120/116	S	10/D	7J	248	774	550	1380
17	65	265/65R17LT	120/117	Q	10/D	8J	272	776	550	1400
	70	245/70R17LT	119/116	S	10/D	7J	248	776	550	1360
		LT265/70R17	121/118	S	10/D	8J	272	804	550	1450
18	60	265/60R18LT	119/116	Q	10/D	8J	272	775	550	1360
20	55	275/55R20	117/XL	T		8½J	284	810	290	1285
		33×12.50R20LT	114	Q	10/D	10J	318	832	450	1180
22		33×12.50R22LT	109	Q	10/D	10J	318	832	450	1030





THE WORLD IS YOUR PLAYGROUND



SUV/4X4 SERIES MT ECO SENDERO M / T2 M105

GRIP DRIVE ANTI-TEAR OPERATION AND
CONTROL ON DRY AND WET GROUNDS
SUITABLE FOR OFF-ROAD CARS




EXCELLENT CONTROL PERFORMANCE

Three-layer carcass and strong steel wire belt structure enable tires to have higher skeleton intensity, and provide excellent operation and control performance and durability.



EXCELLENT OFF-ROAD PERFORMANCE

Special rough pattern piece design enables tread pattern pieces to stretch into soil, gravel and wet grassland and play a strong grip in muddy and gravel roads and other harsh road conditions, so as to bring more outstanding off-road traction. Open shoulder pattern pieces ensure excellent self-cleaning ability and high traction of tires on gravel, muddy and other non-paved roads.



RIM PROTECTION DESIGN

Special tyre protection design is used to avoid damages to the rim.

ECO SENDERO M / T2 M105

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	75	LT235/75R15	104/101	S	6/C	6½J	235	739	350	900
		30×9.50R15LT	104	Q	6/C	7½J	240	756	350	900
		31×10.50R15LT	109	Q	6/C	8½J	268	781	350	1030
		32×11.50R15LT	113	Q	6/C	9J	290	807	350	1150
		33×12.50R15LT	108	Q	6/C	10J	318	832	250	1000
16	70	LT265/70R16	117/114	Q	8/D	8J	272	784	450	1285
		265/75R16LT	112/109	Q	6/C	7½J	267	810	350	1120
	75	LT245/75R16	108/104	Q	6/C	7J	248	780	350	1000
		LT265/75R16	123/120	Q	10/E	7½J	267	810	550	1550
		LT285/75R16	126/123	R	10/E	8J	286	840	550	1700
17	65	LT265/65R17	120/117	Q	10/E	8J	272	782	550	1400
		LT265/70R17	121/118	Q	10/E	8J	272	810	550	1450
	70	LT285/70R17	121/118	R	10/E	8½J	292	838	550	1450
		LT295/70R17	121/118	Q	10/E	8½J	299	852	550	1320
		35×12.50R17LT	121	Q	10/E	10J	318	883	450	1450
18	65	LT285/65R18	125/122	Q	10/E	8½J	292	833	550	1650
		33×12.50R18LT	118	Q	10/E	10J	318	832	450	1320
	65	35×12.50R18LT	118	Q	8/D	10J	318	883	350	1320
		LT275/65R20	126/123	Q	10/E	8J	279	872	550	1700
		33×12.50R20LT	114	Q	10/E	10J	318	832	450	1180
20	65	35×12.50R20LT	121	Q	10/E	10J	318	883	450	1450
		37×13.50R20LT	127	Q	10/E	11J	345	934	450	1750
	65	33×12.50R22LT	109	Q	10/E	10J	318	832	450	1030
		35×12.50R22LT	117	Q	10/E	10J	318	883	450	1285
		37×13.50R22LT	123	K	10/E	11J	345	934	450	1550
24	65	37×13.50R24LT	120	Q	10/E	11J	345	934	450	1400





EXCELLENT PERFORMANCE



RACING SERIES



SPORT RACING

RELEASE YOUR PASSION,
ENJOY THE HAPPINESS OF DRIVING.

SUITABLE FOR RACING CARS & SPORTS CARS

W Racing SPORT RACING

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	50	195/50R15	82	W	6J	201	577	250	475
	55	195/55R15	85	V	6J	201	595	250	515
17	40	235/40R17	90	W	8½J	241	620	250	600
	45	215/45R17	91/XL	W	7J	213	626	290	615
18	35	235/45R17	94	W	8J	236	644	250	670
		265/35R18	97/XL	W	9½J	271	643	290	730
	40	285/35R18	101/XL	W	10J	290	657	290	825
		225/40R18	88	W	8J	230	637	250	560
		235/40R18	91	W	8½J	241	645	250	615
		245/40R18	93	W	8½J	248	653	250	650
		275/40R18	103/XL	W	9½J	278	677	290	875
		245/45R18	100/XL	W	8J	243	677	290	800
	50	255/50R18	106/XL	V	8J	265	713	290	950
		265/50R18	103	W	8½J	277	722	250	875
	55	255/55R18	109/XL	V	8J	265	737	290	1030
	60	265/60R18	114/XL	V	8J	272	775	290	1180



COMPETITIVE PATTERN

Competitive pattern with wide tread sharply increases the tire-road contact, making better grip and steering force during cornering.



DOUBLE LONGITUDINAL PATTERN

Main pattern in center ensures the stability during high-speed straight driving. Exterior pattern provides strong grip during rapid cornering with its hard-enough exterior parts. Enlarged drainage grooves with knurling pattern designed at the bottom expedite drainage,improving safety performance during rainy days.



EXCELLENT GRIP OF TIRES

Bigger shoulder design brings more tire-road contact and less tread deformation.Tiny steel on tire shoulder strengthens the grip during cornering.



SAFE RIDE & ALL ROUND PERFORMANCE



ALL SEASON SERIES

ALL SEASON versat
SC501

NAVIGATE THROUGH CHANGING WEATHER
AND COMPLEX TERRAINS WITH EASE,
ENSURING PEACE OF MIND AND
CONVENIENCE

PRODUCT FEATURES



TREAD DESIGN

The tread is designed with a special formula for all-season tires to ensure comprehensive tire performance in summer and winter.



TREAD SHOULDER DESIGN

The shoulders adopt a summer tire design to ensure excellent performance on dry and wet roads. The pitch width and pitch arrangement are optimized to reduce tread noise.



PATTERN DESIGN

The crown adopts a winter tire design. The dense distribution of tiny steel pieces ensures impressive grip on snow-covered roads.



OVERALL PATTERN

The overall tread adopts a directional design, which maintains good high-speed stability, as well as strong snow removal and rain drainage performance.





ALL SEASON versat **SC501**

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
13	70	155/70R13	75	T	4½J	157	548	250	387
		165/70R13	79	T	5J	170	562	250	437
	80	155/80R13	79	T	4.50B/4 ½J	157	578	240	437
14	60	185/60R14	82	H	5½J	189	578	250	475
	65	155/65R14	75	T	4.50B/4½J	157	558	250	387
		175/65R14	82	T	5J	177	584	250	475
	70	165/70R14	81	T	5J	170	588	250	462
		175/70R14	88/XL	T	5J	177	602	290	560
15	50	195/50R15	82	V	6J	201	577	250	475
	55	185/55R15	86/XL	H	6J	194	585	290	530
	60	185/60R15	88/XL	H	5½J	189	603	290	560
		195/60R15	88	H	6J	201	615	250	560
	65	175/65R15	84	H	5J	177	609	250	500
		185/65R15	88	H	5½J	189	621	250	560
		195/65R15	91	H	6J	201	635	250	615
		195/65R15	95/XL	H	6J	201	635	290	690
		215/65R15	96	H	6½J	221	661	250	710
	16	45	195/45R16	84/XL	V	6 ½J	195	582	290
215/45R16			90/XL	V	7J	213	600	290	600
55		195/55R16	91/XL	V	6J	201	620	290	615
		205/55R16	91	V	6½J	214	632	250	615
		205/55R16	94/XL	V	6½J	214	632	290	670
		215/55R16	97/XL	V	7J	226	642	290	730
60		205/60R16	96/XL	V	6J	209	652	290	710
70		215/70R16	100	H	6½J	221	708	250	800
17	45	205/45ZR17	88/XL	W	7J	206	616	290	560
		215/45ZR17	91/XL	W	7J	213	626	290	615
		225/45ZR17	94/XL	W	7½J	225	634	290	670
		235/45ZR17	97/XL	W	8J	236	644	290	730
		245/45ZR17	99/XL	W	8J	243	652	290	775
	50	205/50ZR17	93/XL	W	6½J	214	638	290	650
		215/50ZR17	95/XL	W	7J	226	648	290	690
		225/50ZR17	98/XL	W	7J	233	658	290	750
	55	215/55ZR17	98/XL	W	7J	226	668	290	750
		225/55ZR17	101/XL	W	7J	233	680	290	825
		235/55ZR17	103/XL	W	7½J	245	690	290	875
	60	215/60R17	100/XL	V	6½J	221	690	290	800
18	40	225/40ZR18	92/XL	W	8J	230	637	290	630
	45	225/45R18	95/XL	V	7½J	225	659	290	690
	55	215/55R18	99/XL	V	7J	226	693	290	775

ALL SEASON versat **SC501**

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Ov erall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
14	55	185/55R14	80	H	6J	194	560	250	450
	60	165/60R14	79/XL	H	5J	170	554	290	437
	65	165/65R14	79	T	5J	170	570	250	437
		185/65R14	86	H	5½J	189	596	250	530
15	55	195/55R15	85	V	6J	201	595	250	515
	65	165/65R15	81	H	5J	170	595	250	462
		205/65R15	94	V	6J	209	647	250	670
	45	205/45R16	87/XL	W	7J	206	590	290	545
16	50	185/50R16	81	V	6J	194	592	250	462
	55	195/50R16	88/XL	V	6J	201	602	290	560
		185/55R16	87/XL	V	6J	194	610	290	545
		225/55ZR16	99/XL	W	7J	233	654	290	775
	60	215/60R16	99/XL	V	6½J	221	664	290	775
	65	215/65R16	102/XL	V	6½J	221	686	290	850
17	40	215/40R17	87/XL	V	7½J	218	604	290	545
	55	205/55R17	95/XL	W	6½J	214	658	290	690
	60	225/60R17	103/XL	V	6½J	228	702	290	875
		225/65R17	106/XL	V	6½J	228	724	290	950
		235/65R17	108/XL	W	7J	240	738	290	1000
18	40	215/40R18	89/XL	W	7½J	218	629	290	580
		235/40R18	95/XL	Y	7½J	241	645	290	690
		245/40R18	97/XL	Y	8½J	248	653	290	730
		215/45R18	93/XL	V	7J	213	651	290	650
	45	235/45ZR18	98/XL	Y	8J	236	669	290	750
		245/45R18	100/XL	Y	8J	243	677	290	800
		215/50R18	92	W	7J	226	673	250	630
	50	225/50R18	99/XL	W	7J	233	683	290	775
		235/50R18	101/XL	W	7½J	245	693	290	825
		225/55R18	98	V	7J	233	705	250	750
	55	235/55R18	104/XL	V	7½J	245	715	290	900
		225/60R18	104/XL	V	6½J	228	727	290	900
	60	235/60R18	107/XL	V	7J	240	739	290	975
19	35	235/35ZR19	91/XL	Y	8½J	241	647	290	615
		255/35ZR19	96/XL	Y	9J	260	661	290	710
		225/40ZR19	93/XL	Y	8J	230	663	290	650
	40	235/40ZR19	96/XL	Y	8½J	241	671	290	710
		245/40ZR19	98/XL	Y	8½J	248	679	290	750
		225/45ZR19	96/XL	Y	7½J	225	685	290	710
	45	235/45ZR19	99/XL	Y	8J	236	695	290	775
		245/45ZR19	102/XL	W	8J	243	703	290	850
		235/50R19	99	V	7½J	245	719	290	875
	50	255/50R19	107/XL	V	8J	265	739	290	975
		205/55ZR19	97/XL	W	6½J	214	709	290	730
	55	225/55R19	99	V	7J	233	731	250	775
		235/55ZR19	105/XL	W	7½J	245	741	290	925
20	35	235/35ZR20	92/XL	W	8½J	241	672	290	630
	45	255/45ZR20	105/XL	W	8½J	255	738	290	925
	55	195/55R20	95/XL	H	6J	201	722	290	690

*coming soon

SAFE RIDE & ALL ROUND PERFORMANCE



ALL SEASON SERIES

ALL SEASON versat SC513

NAVIGATE THROUGH CHANGING WEATHER
AND COMPLEX TERRAINS WITH EASE,
ENSURING PEACE OF MIND AND
CONVENIENCE

SUITABLE FOR COMMERCIAL LIGHT TRUCK



REINFORCED CARCASS,THE BETTER LOAD-BEARING PERFORMANCE

Designed for commercial light truck with double carcass structure,it has better load-bearing performance.



SUPERIOR WETLAND PERFORMANCE AND SKID RESISTANCE

The tread groove design with S shapes on both sides and Z shapes in the middle can greatly enhance the tire drainage performance.The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on the icy and wet roads .



EXCELLENT FOUR SEASONS ADAPTABILITY PERFORMANCE

Bring excellent performance to the tire no matter in spring,summer,autumn or winter,by using a special all-season tire compound . The optimized high sipe density tread can effectively improve the driving and braking of the tire on snow-covered roads, thus ensuring vehicle safety and stability on icy roads.

ALL SEASON versat **SC513**

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
15	70	195/70R15C	104/102	R	8/D	6J	201	655	450	900
		215/70R15C	109/107	R	8/D	6½J	221	683	450	1030
16	65	195/65R16C	104/102	T	8/D	6J	201	660	475	900
		205/65R16C	107/105	R	8/D	6J	209	672	475	975
		215/65R16C	109/107	R	8/D	6½J	221	686	475	1030
		225/65R16C	112/110	R	8/D	6½J	228	698	475	1120
		235/65R16C	115/113	R	8/D	7J	240	712	475	1215
	75	195/75R16C	107/105	T	8/D	5½J	196	698	475	975
		215/75R16C	113/111	R	8/D	6J	216	728	475	1150
		225/75R16C	121/120	R	10/E	6J	223	744	575	1450



EFFICIENT DRIVING



WINTER-maX A1 SW211

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
15	50	195/50R15	82	H	6J	201	577	250	475
	55	185/55R15	86/XL	H	6J	194	585	290	530
		195/55R15	85	H	6J	201	595	250	515
16	55	195/55R16	87	H	6J	201	620	250	545
		205/55R16	91	H	6½J	214	632	250	615
		205/55R16	94/XL	H	6½J	214	632	290	670
		215/55R16	97/XL	H	7J	226	642	290	730
		225/55R16	99/XL	H	7J	233	654	290	775
	60	205/60R16	96/XL	H	6J	209	652	290	710
		215/60R16	99/XL	H	6½J	221	664	290	775
		225/60R16	102/XL	H	6½J	228	676	290	850
		235/60R16	100	H	7J	240	688	250	800
		215/65R16	98	H	6½J	221	686	250	750
17	45	215/45R17	91/XL	V	7J	213	626	290	615
		225/45R17	94/XL	V	7½J	225	634	290	670
		235/45R17	97/XL	V	8J	236	644	290	730
	50	205/50R17	93/XL	V	6½J	214	638	290	650
		215/50R17	95/XL	V	7J	226	648	290	690
		225/50R17	98/XL	V	7J	233	658	290	750
	55	205/55R17	95/XL	V	6½J	214	658	290	690
		215/55R17	98/XL	V	7J	226	668	290	750
		225/55R17	101/XL	V	7J	233	680	290	825
		235/55R17	103/XL	V	7½J	245	690	290	875
18	40	225/40R18	92/XL	V	8J	230	637	290	630
		235/40R18	95/XL	V	8½J	241	645	290	690
		245/40R18	97/XL	V	8½J	248	653	290	730
	45	235/45R18	98/XL	V	8J	236	669	290	750
	50	225/50R18	99/XL	V	7J	233	683	290	775
	55	255/55R18	109/XL	V	8J	265	737	290	1030
		225/35R19	88/XL	V	8J	230	641	290	560
19	35	235/35R19	91/XL	V	8½J	241	647	290	615
		245/35R19	93/XL	V	8½J	248	655	290	650
		255/35R19	96/XL	V	9J	260	661	290	710
	40	255/40R19	100/XL	V	9J	260	687	290	800
	45	245/45R19	102/XL	V	8J	243	703	290	850
20	55	235/55R19	105/XL	V	7½J	245	741	290	925
	35	315/35R20	110/XL	V	11J	320	728	290	1060
	40	245/40R20	99/XL	V	8½J	248	704	290	775
21	40	275/40R20	106/XL	V	91/2J	278	728	290	950
	50	285/50R20	116/XL	H	9J	297	794	290	1250
	40	295/40R21	111/XL	V	10½J	301	769	290	1090



WINTER SERIES

WINTER-maX A1 SW211

SPECIAL PATTERN DESIGN ENABLES TO
ENJOY FLEXIBLE OPERATION AND
CONTROL ON ICY AND SNOWY ROADS

SUITABLE FOR ICY AND SNOWY ROADS



FOAM RUBBER TECHNOLOGY

1. It can fully absorb water and break the water film;
2. It keeps the rubber soft to provide maximum driving force.



MORE HORIZONTAL LUGS

1. They can absorb more water and effectively remove the water film;
2. They can increase the grip in corners;
3. They can improve the overall drainage function of the tire.



THE HERRINGBONE TREAD GIVES THE TIRE A STRONGER GRIP

The herringbone tread has strong ice-breaking and drainage performance. A bigger ground contact area ensures a better tire performance on snow and ice and enhances tire grip on icy roads.



ASYMMETRICAL TREAD DESIGN

1. It improves tire handling;
2. It improves tire performance on snow-covered and icy roads.

WINTER EXCLUSIVE



WINTER SERIES WINTER-maX U1 SW611

**STRONG GRIP AND SUPER-STRONG
SLIP RESISTANCE**

SUITABLE FOR ICY AND SNOWY ROAD CONDITIONS



NO SLIP ON SNOWY ROADS

Advanced plece-shape pattern design with special formula for ice and snow provides newly-developed tread with better flexibility and leads the contact area between tire and ground to become larger when tires are driven along a snowy road,so the snow grooves are not easy to be cut off,and tires can be provided with maximum force.



MORE BALANCED PERFORMANCE

Symmetric pattern design and big shoulder pattern piece design , can produce lateral forces when tires are driven,improve traction on snowy and icy roads,significantly improve operation and control and braking performance,can increase driving precision on dry and wet roads to the maximum,and are more helpful to reduce driving noise.



THE Y-SHAPED GROOVE DESIGN BRINGS BETTER DRAINAGE

The directional Y-shaped grooves give the tire shoulders a good drainage function.

WINTER-maX U1 **SW611**

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
13	70	155/70R13	75	T	4½J	157	548	250	387
		165/70R13	79	T	5J	170	562	250	437
		165/70R13	83/XL	T	5J	170	562	290	487
		175/70R13	82	T	5J	177	576	250	475
14	80	155/80R13	79	T	4½J	157	578	240	437
	55	185/55R14	80	T	6J	194	560	250	450
		185/60R14	82	T	5½J	189	578	250	475
	60	185/60R14	86/XL	T	5½J	189	578	290	530
		175/65R14	82	T	5J	177	584	250	475
	65	175/65R14	86/XL	T	5J	177	584	290	530
		185/65R14	86	T	5½J	189	596	250	530
		165/70R14	81	T	5J	170	588	250	462
		165/70R14	85/XL	T	5J	170	588	290	515
	70	175/70R14	84	T	5J	177	602	250	500
		175/70R14	88/XL	T	5J	177	602	290	560
		185/70R14	88	T	5½J	189	616	250	560
15	55	185/55R15	86/XL	H	6J	194	585	290	530
		185/60R15	84	T	5½J	189	603	250	500
	60	185/60R15	88/XL	T	5½J	189	603	290	560
		195/60R15	88	T	6J	201	615	250	560
	65	185/65R15	88	T	5½J	189	621	250	560
		195/65R15	91	H	6J	201	635	250	615
		195/65R15	91	T	6J	201	635	250	615
		195/65R15	95/XL	T	6J	201	635	290	690
		205/65R15	94	T	6J	209	647	250	670
		205/65R15	99/XL	T	6J	209	647	290	775
		215/65R15	96	H	6½J	221	661	250	710
		205/55R16	91	T	6½J	214	632	250	615
16	55								

EXCELLENT GRIP ON ICY



WINTER SERIES Studdable

WINTER-maX S1 SW631

SUITABLE FOR SALOON CAR / SUV IN ICY AND
SNOWY ROAD CONDITIONS



DESIGNED FOR ICY AND SNOWY ROAD CONDITIONS

With optimized nail hole arrangement, the entire tire can be equipped with up to 200 snow nails (take 205 / 55R16 for example, depends on the size). The Inlaid nail anti-skid technology provides super-strong grip capability on snowy and icy roads.



SINGLE-ORIENTED PATTERN

Single-oriented pattern design provides effective water evacuation and exceptional wet performance in wet land. This obvious bump pattern designed on tread can improve skid resistance performance on snowy and icy conditions.



MORE SUBTLE DESIGN CAN ENHANCE THE PERFORMANCE OF HANDLING AND

The pattern is shaped like lighting, with concave and convex shapes at the edge of the groove and sharp teeth shapes in the middle. The design provides efficient snow clearing and has significantly enhanced the operation and braking performance in snowy and icy conditions.

WINTER-maX S1 SW631

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std. Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
13	70	175/70R13	82	T		5J	177	576	250	475
	80	155/80R13	83/XL	Q		4½J	157	578	280	487
		155/80R13	84/XL	N		4½J	157	578	280	500
14	60	185/60R14	82	T		5½J	189	578	250	475
		175/65R14	82	T		5J	177	584	250	475
	65	175/65R14	86/XL	T		5J	177	584	290	530
15		185/65R14	86	T		5½J	189	596	250	530
		185R14C	102/100	R	8/D	5½J	188	650	450	850
	60	185/60R15	84	T		5½J	189	603	250	500
16		185/65R15	88	H		5½J	189	621	250	560
	65	195/65R15	91	T		6J	201	635	250	615
		195/65R15	95/XL	T		6J	201	635	290	690
17		205/55R16	91	H		6½J	214	632	250	615
	55	205/55R16	94/XL	T		6½J	214	632	290	670
	60	205/60R16	92	H		6J	209	652	250	630
18		215/65R16	102/XL	H		6½J	221	686	290	850
	45	225/45R17	94/XL	H		7½J	225	634	290	670
	50	225/50R17	98/XL	H		7J	233	658	290	750
19		215/55R17	98/XL	H		7J	226	668	290	750
		225/55R17	101/XL	H		7J	233	680	290	825
	60	215/60R17	96	H		6½J	221	690	250	710
20		225/60R17	103/XL	H		6½J	228	702	290	875
	65	225/65R17	102	T		6½J	228	724	250	850
		235/65R17	104	T		7J	240	738	250	900
21	40	225/40R18	92/XL	H		8J	230	637	290	630
		225/45R18	91	H		7½J	225	659	250	615
	45	225/45R18	95/XL	H		7½J	225	659	290	690
22		225/55R18	102/XL	H		7J	233	705	290	850
	60	225/60R18	104/XL	H		6½J	228	727	290	900
		235/60R18	107/XL	H		7J	240	739	290	975
23	55	275/55R20	117/XL	H		8½J	284	810	290	1285



STRONG SNOW GRIP AND CONTROL



WINTER FORCE **SW312**



WINTER SERIES Soft Compound

**WINTER FORCE
SW312**

SUITABLE FOR CARS/SUVS ON SNOW AND ICE



BETTER BRAKING PERFORMANCE

The bottom of the tread groove is equipped with reinforcing bars, which can increase the connectivity and stiffness between the two groove walls and increase the snow grip. The jagged design of the main groove walls increases the tire's ability to grip snow and improves braking performance.




PRECISE AND SAFE MANEUVERING

The asymmetric tread design with 2 wide grooves on the inner side can fully ensure the drainage ability of the tire on ice and snow; 1 longitudinal main groove on the outer side together with an irregular thin groove can increase the grounding area of the tire's outer side, ensuring the tire's maneuverability and safety on icy and snowy road surfaces.



EXCELLENT SNOW GRIP

Each tread block is cut off from each other with horizontal grooves to increase the number of tread blocks and horizontal grooves, the grooves are interlocked with each other to catch and press snow quickly, and the interlocking of snow columns and tread blocks improves the grip on snow.

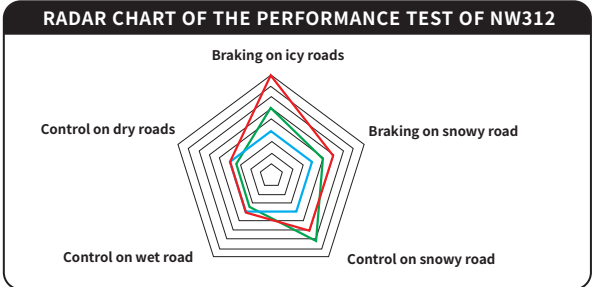

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
13	60	175/60R13	77	Q	5.00B/5J	177	540	250	412
	65	155/65R13	73	Q	4.50B/4½J	157	532	250	365
		165/65R13	77	Q	5.00B/5J	170	544	250	412
	70	165/70R13	83/XL	Q	5.00B/5J	170	562	290	487
		175/70R13	82	Q	5.00B/5J	177	576	250	475
14		165/60R14	75	Q	5.00B/5J	170	554	250	387
	60	175/60R14	79	Q	5.00B/5J	177	566	250	437
		185/60R14	82	Q	5½J	189	578	250	475
		195/60R14	86	Q	6J	201	590	250	530
		155/65R14	75	Q	4.50B/4J	157	558	250	387
	65	175/65R14	82	Q	5.00B/5J	177	584	250	475
		185/65R14	90/XL	Q	5½J	189	596	290	600
		165/70R14	85/XL	Q	5.00B/5J	170	588	290	515
	70	175/70R14	88/XL	Q	5.00B/5J	177	602	290	560
		185/70R14	88	Q	5½J	189	616	250	560
15	55	185/55R15	86/XL	Q	6J	194	585	290	530
		195/55R15	85	Q	6J	201	595	250	515
	60	185/60R15	84	Q	5½J	189	603	250	500
		195/60R15	88	Q	6J	201	615	250	560
		175/65R15	84	Q	5J	177	609	250	500
	65	185/65R15	88	Q	5½J	189	621	250	560
		195/65R15	91	S	6J	201	635	250	615
		205/65R15	94	Q	6J	209	647	250	670
	70	205/70R15	96	Q	6J	209	669	250	710
		205/55R16	91	S	6½J	214	632	250	615
16	55	215/55R16	97/XL	Q	7J	226	642	290	730
		225/55R16	99/XL	Q	7J	233	654	290	775
		195/60R16	89	Q	6J	201	640	250	580
	60	205/60R16	92	Q	6J	209	652	250	630
		215/60R16	99/XL	Q	6½J	221	664	290	775
		225/60R16	98	Q	6½J	228	676	250	750
	65	205/65R16	95	Q	6J	209	672	250	690
		215/65R16	98	Q	6½J	221	686	250	750
	70	215/70R16	100	Q	6½J	221	708	250	800



WINTER FORCE SW312

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)
17	45	225/45R17	91	T	7½J	225	634	250	615
		235/45R17	97/XL	S	8J	236	644	290	730
		255/45R17	102/XL	S	8½J	255	662	290	850
	50	215/50R17	95/XL	S	7J	226	648	290	690
		225/50R17	98/XL	S	7J	233	658	290	750
		235/50R17	100/XL	S	7½J	245	668	290	800
	55	205/55R17	91	T	6½J	214	658	250	615
		215/55R17	94	S	7J	226	668	250	670
		225/55R17	97	S	7J	233	680	250	730
		235/55R17	103/XL	S	7½J	245	690	290	875
	60	215/60R17	96	S	6½J	221	690	250	710
		225/60R17	103/XL	S	6½J	228	702	290	875
	65	225/65R17	102	S	6½J	228	724	250	850
		235/65R17	104	S	7J	240	738	250	900
		245/65R17	111/XL	S	7J	248	750	290	1090
		265/65R17	112	S	8J	272	776	250	1120
	70	245/70R17	110	S	7J	248	776	250	1060
18	40	255/40R18	99/XL	S	9J	260	661	290	775
	45	225/45R18	95/XL	S	7½J	225	659	290	690
		245/45R18	100/XL	S	8J	243	677	290	800
	50	215/50R18	92	T	7J	226	673	250	630
		235/50R18	101/XL	S	7½J	245	693	290	825
	55	215/55R18	99/XL	S	7J	226	693	290	775
		235/55R18	104/XL	S	7½J	245	715	290	900
	60	225/60R18	104/XL	S	6½J	228	727	290	900
		235/60R18	107/XL	S	7J	240	739	290	975
		245/60R18	105	T	7J	248	751	250	925
		265/60R18	114/XL	S	8J	272	775	290	1180
	65	235/65R18	106	T	7J	240	763	250	950
19	45	225/45R19	92	H	7½J	225	685	250	630
	50	235/50R19	99	T	7½J	245	719	250	775
		255/50R19	103	T	8J	265	739	250	875
		225/55R19	99	T	7J	233	731	250	775
	55	235/55R19	101	T	7½J	245	741	250	825
		245/55R19	103	S	7½J	253	753	250	875
20	30	305/30R20	99	Q	11J	313	692	250	775
	45	245/45R20	99	T	8J	243	728	250	775
		275/45R20	110/XL	T	9J	273	756	290	1060
	50	255/50R20	109/XL	H	8J	265	764	290	1030
	55	235/55R20	105/XL	S	7½J	245	766	290	925
21	45	255/45R21	102	S	8½J	255	736	250	850
		265/45R21	104	T	9J	266	771	250	900

WINTER FORCE SW312

Inch	Aspect Rating	Size	Load Index	Speed Rating	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPa)	Load Capacity (kg)	
16	70	235/70R16	106	S	7J	240	736	250	950 *	
		245/70R16	107	S	7J	248	750	250	975 *	
		255/70R16	111	S	7½J	260	764	250	1090 *	
		265/70R16	112	S	8J	272	778	250	1120 *	
17	50	205/50R17	89	T	6½J	214	638	250	580 *	
18	40	245/40R18	93	T	8½J	248	653	250	650 *	
	45	235/45R18	94	T	8J	236	669	250	670 *	
	50	225/50R18	95	T	7J	233	683	250	690 *	
		245/50R18	100	T	7½J	253	703	250	800 *	
	55	225/55R18	98	T	7J	233	705	250	750 *	
	65	265/65R18	114	T	8J	272	801	250	1180 *	
19	35	275/35R19	96	H	9½J	278	675	250	710 *	
	40	235/40R19	92	H	8½J	241	671	250	630 *	
		245/40R19	94	H	8½J	248	679	250	670 *	
		275/40R19	101	H	9½J	275	703	250	825 *	
		235/45R19	95	H	8J	236	695	250	630 *	
	45	245/45R19	98	H	8J	243	703	250	750 *	
		255/45R19	100	H	8½J	255	713	250	800 *	
		245/50R19	101	H	7½J	253	729	250	825 *	
	50	265/50R19	106	H	8½J	277	749	250	950 *	
		255/55R19	107	H	8J	265	763	250	975 *	
	55	265/55R19	109	H	8½J	277	775	250	1030 *	
		235/60R19	103	H	7J	240	765	250	875 *	
	60	255/60R19	109	H	7½J	260	789	250	1030 *	
	20	35	275/35R20	98	H	9½J	278	700	250	750 *
			315/35R20	106	H	11J	320	728	250	950 *
		40	255/40R20	97	H	9J	260	712	250	730 *
265/40R20			100	H	9½J	271	720	250	800 *	
275/40R20			102	H	9½J	278	728	250	850 *	
255/45R20			101	H	8½J	255	738	250	825 *	
45		265/45R20	104	H	9J	266	746	250	900 *	
		285/45R20	108	H	9½J	285	764	250	1000 *	
		235/50R20	100	H	7½J	245	744	250	800 *	
50		245/50R20	102	H	7½J	253	754	250	850 *	
		275/50R20	109	H	8½J	284	784	250	1030 *	
		285/50R20	112	H	9J	297	794	250	1120 *	
55		255/55R20	110/XL	H	8J	265	788	290	1060 *	
		275/55R20	113	H	8½J	284	810	250	1150 *	
21	45	275/45R21	107	H	9J	273	781	250	975 *	
		285/45R21	109	H	9½J	285	789	250	1030 *	
22	35	315/35ZR22	111/XL	H	11J	320	779	290	1090 *	
	40	265/40R22	106/XL	H	9½J	271	771	290	950 *	
		275/40R22	107/XL	H	9½J	278	779	290	975 *	
		285/40R22	106	H	10J	290	787	250	950 *	
		45	285/45R22	110	H	9½J	285	815	250	1060 *

*coming soon

DRIVING FREEDOM AND SAFETY IN WINTER



WINTER SERIES WINTER FORCE SW103

SUITABLE FOR COMMERCIAL LIGHT TRUCK IN ICY AND SNOWY ROAD CONDITIONS



REINFORCED CARCASS,THE BETTER LOAD-BEARING PERFORMANCE

Designed for commercial light truck with double carcass structure,it has better load-bearing performance.



SUPERIOR WETLAND PERFORMANCE AND SKID RESISTANCE

The tread groove design with S shapes on both sides and Z shapes in the middle can greatly enhance the tire drainage performance.The wide groove and asymmetrical pattern design bring excellent handling stability and outstanding drainage performance on the icy and wet roads .



SUPER-STRONG GRIP ON ICY AND SNOWY ROAD

The upgraded tread groove design can effectively strengthen the tire grip and brake performance,which ensures safety and stability while driving.

WINTER FORCE SW103

Inch	Aspect Rating	Size	Load Index	Speed Rating	Level	Std.Rim	Section Width (mm)	Overall Diameter (mm)	Max Air Pressure (kPA)	Load Capacity (kg)
14	70	165/70R14C	89/87	R	6/C	5J	170	588	375	580
		185R14C	102/100	Q	8/D	5½J	188	650	450	850
15	70	195/70R15C	104/102	R	8/D	6J	201	655	450	900
		215/70R15C	109/107	R	8/D	6½J	221	683	450	1030
		225/70R15C	112/110	R	8/D	6½J	228	697	450	1120
		195/65R16C	104/102	T	8/D	6J	201	660	475	900
16	65	205/65R16C	107/105	R	8/D	6J	209	672	475	975
		215/65R16C	109/107	R	8/D	6½J	221	686	475	1030
		225/65R16C	112/110	R	8/D	6½J	228	698	475	1120
		235/65R16C	115/113	R	8/D	7J	240	712	475	1215
	75	195/75R16C	107/105	T	8/D	5½J	196	698	475	975
		215/75R16C	113/111	R	8/D	6J	216	728	475	1150
		225/75R16C	121/120	R	10/E	6J	223	744	575	1450

